


3 CORE RTD CABLE

TEFLON-FEP INSULATED - 260°C

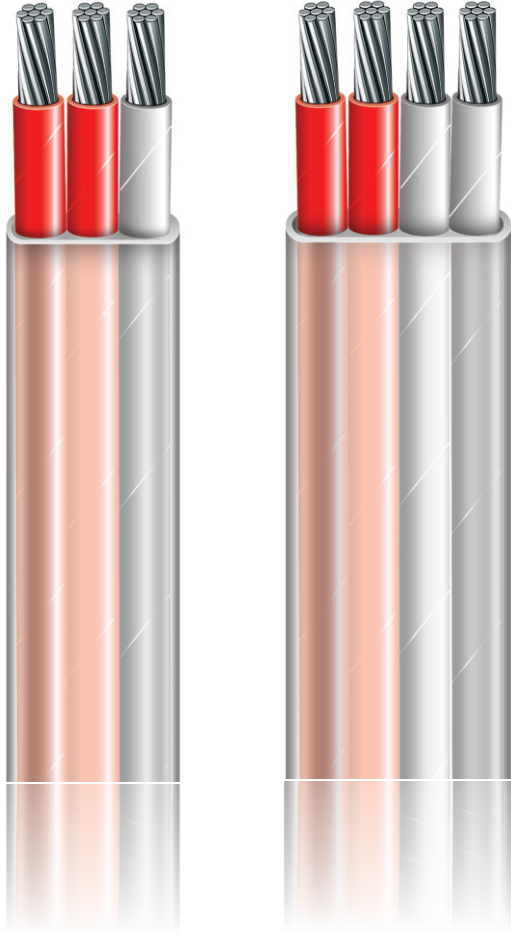

SPECIFICATIONS:

Conductor	:	Multistrand, Bare Copper Material.
Core Insulation	:	Teflon Insulated.
Construction	:	Parallel Conductors.
Outer Jacket	:	Fep Insulated.
Operating Temperature	:	260°C.
Colour Code	:	According to DIN.

FEATURES:


- 1) Max. Temp. Up to 260°.
- 2) Excellent Heat Resistant.
- 3) Outstanding Insulating properties.
- 4) Good Thermal stability.
- 5) High mechanical Strain.
- 6) Flame Retardant.
- 7) Passes JSS-51034 Flame Test.
- 8) Abrasion Resistance.

AVAILABLE OPTIONS:

- 1) Other Fluoro Polymer Insulation.
- 2) Silver Plated Metal Over Braided.
- 3) SPC, NPC, TPC Conductors.
- 4) 2 & 4 Cores.

ORDERING CODE

RT401 BC 3 RRW FLAT

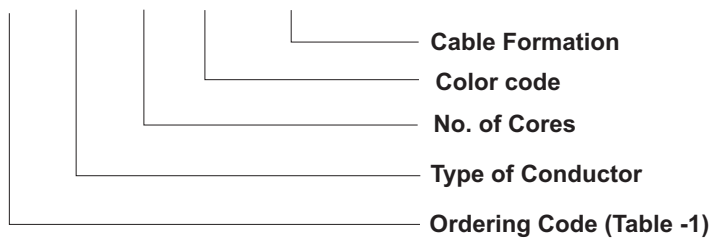

APPLICATIONS:

- 1) Steel or Sponge Plant.
- 2) Glass Plant.
- 3) Chemical Plant.
- 4) Power Plant.
- 5) Non-Ferrous Metal Plant.
- 6) Testing (Laboratories).
- 7) Used in Control Rooms

Table - 1 : Geometrical Data

CABLE ORDERING CODE	NO. OF STRANDS	STRAND DIAMETER (mm)	AREA OF CONDUCTOR (sqmm)	BARE CONDUCTOR DIA.(mm)	FLAT	CABLE DIMENSION (mm) (MAX.)	CABLE WT. (APPX.) gm/meter
RT401	7	0.160	0.14	0.47	FLAT	1.67X3.61	15.00
RT402	7	0.200	0.22	0.59	FLAT	1.79X3.97	19.00
RT403	19	0.127	0.24	0.62	FLAT	1.82X4.06	20.5

These are some standard cables, however we can offer as per your specific requirement also